


AR53

Loosening, Separating, Transporting



**WACKER
NEUSON**
all it takes!

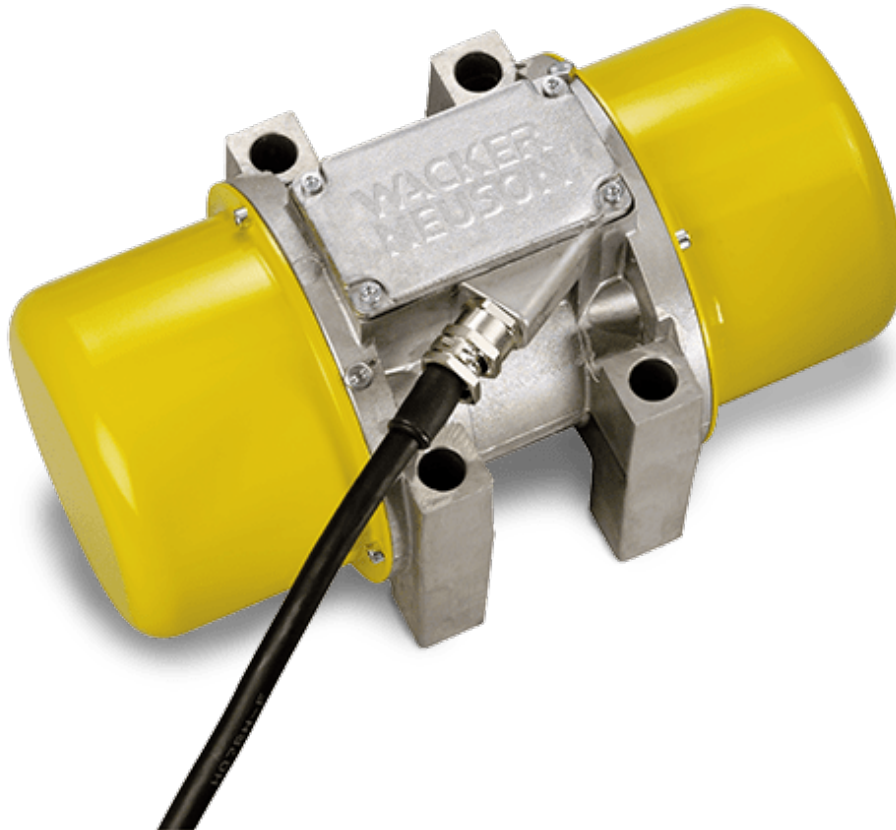

A lasting solution: AR53

The AR53 will show its strength particularly when used constantly for 24 hours: It performs with maximum reliability and safety - even in the toughest operating conditions. This is due to the vibration and heat resistant windings of the electric motor (plastic sealing, Class H up to 180 °C) as well as the extremely robust special bearings. The result: long service life and minimum maintenance.

- Powerful and reliable performance
- High operating reliability and long service life due to its extremely robust design
- Finely adjustable centrifugal forces via adjustable eccentric weight discs.
- Vibration resistant design
- Maintenance-free—no re-greasing necessary; contains lifetime greased ball bearings.

AR53 Technical specifications

AR53/3/400*

Vibrations	3,000 rpm
Frequency	50 Hz
Standard centrifugal force	8.16 kN
Centrifugal force max.	14.14 kN
Rated voltage 3~	400 V
Rated current	1.7 A
Engine performance	0.9 kW
L x W x H	338 x 188 x 188 mm
Weight	16.8 kg
Fastening	90 x 154 mm

* No power cable included in this product.

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.
Copyright © 2021 Wacker Neuson SE.