

DT05

Track Dumpers



**WACKER
NEUSON**
all it takes!



The space saving miracle


Wacker Neuson's track dumper DT05 can be maneuvered on any surface with centimeter-accuracy, thanks to its compact dimensions and precision control. It really comes into its own where space is very tight and agility is a must.

- The hydrostatic drive enables easy and comfortable operation.
- Powerful engines (gasoline or diesel); 2-stage speed adjustment.
- Robust crawler design guarantees long service life with low wear and tear.
- Optimal ratio between low net weight and maximum payload.
- Ultra-compact dimensions (66 cm), ideal for working in confined spaces and making its way through standard doors; high ground clearance. Optional high-tipping skip available.

DT05 Technical specifications

| | front tip skip | high tip skip |
|---|---------------------|---------------------|
| Operating data | | |
| Shipping weight - gasoline engine kg | 420 | 475 |
| Shipping weight SLE kg | 500 | |
| Shipping weight - diesel engine kg | 465 | 520 |
| Shipping weight SLE kg | 545 | |
| Payload max. kg | 500 | 400 |
| Skip capacity level I | 273 | 170 |
| Skip capacity heaped I | 313 | 290 |
| L x W x H mm | 1,630 x 660 x 1,185 | 1,510 x 660 x 1,185 |
| Engine / Motor | | |
| Engine / Motor manufacturer | Honda | Honda |
| Engine / Motor type | GX200 | GX200 |
| Engine performance - gasoline engine kW | 4.5 | 4.5 |
| Engine performance - diesel engine kW | 4.9 | 4.9 |
| at rpm rpm | 3,600 | 3,600 |
| Travel speed gasoline engine km/h | 3.9 | 3.9 |
| Travel speed diesel engine km/h | 4 | 4 |
| Gradeability % | 36 | 36 |
| Fuel tank capacity Benzin l | 3.6 | 3.6 |

DT05 Dimensions

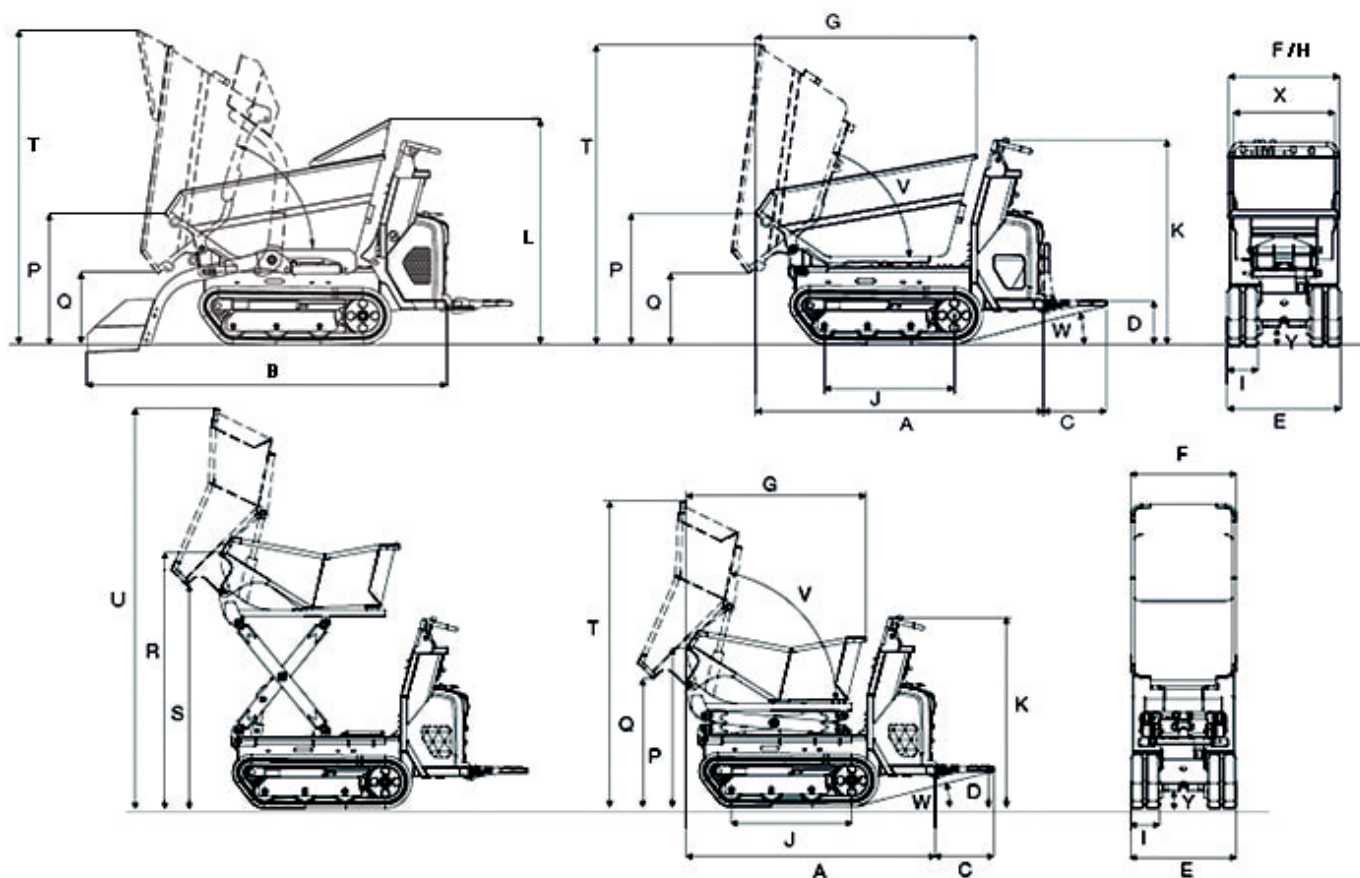

| | | Front tip skip | High tip skip |
|---|--|----------------|---------------|
| A | Length (without running board) | 1,670 mm | 1,550 mm |
| B | Length with self-loading equipment (without running board) | 2,149 mm | |
| C | Length of running board | 365 mm | 387 mm |
| D | Height over running board | 252 mm | 252 mm |
| E | Width undercarriage | 660 mm | 660 mm |
| X | Width control console | 589 mm | 660 mm |
| F | Skip width | 660 mm | 660 mm |
| G | Length | 1,280 mm | 1,120 mm |
| H | Width with self-loading equipment | 700 mm | |
| I | Chain width track | 180 mm | 180 mm |
| J | Length track | 753 mm | 753 mm |
| K | Height over control console | 1,185 mm | 1,185 mm |
| L | Height over skip hand protector | 1,310 mm | |
| P | Height of skip front edge | 760 mm | 993 mm |
| Q | Dump height max. | 410 mm | 1,397 mm |
| R | Height of skip front edge when raised | | 1,600 mm |
| S | Dump height max. of high-tipping skip when raised | | 1,397 mm |
| T | Height max., skip raised | 1,735 mm | 1,907 mm |

| | | | |
|---|--|--------|----------|
| U | Height max., high-tipping skip raised | | 2,500 mm |
| V | Dump angle skip dumping | 72 ° | 77 ° |
| W | Bucket rollback running board retraction | 15 ° | 14 ° |
| Y | Ground clearance | 110 mm | 110 mm |

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.
Copyright © 2021 Wacker Neuson SE.